

A9 Series

Surface Mount



APPLICATIONS:

- ETL/cETL Listed Dry Location
- Cleanroom
(Classes 10-100,000; ISO Classes 4-9)
- Industrial & Commercial

FEATURES:

- Luminaires adaptable to your specific needs
- Premium Driver with Dimming standard
- Every luminaire tested to assure customer satisfaction
- 5-Year limited warranty

SPECIFICATIONS

HOUSING:

Constructed of heavy duty extruded, anodized aluminum. Wireway access can be provided in the top (W5 option).

LENS:

Extruded from a proprietary impact modified acrylic blend, specially formulated to minimize hot spots and provide maximum light transmission. This lens features a smooth exterior and utilizes light controlling longitudinal prisms that direct light output into the room, provides UV filtering, and reduces glare. This high performing lens is the ideal solution for modern LED technology.

END CAPS:



Laser cut aluminum with powder coat finish. Knock outs are provided in each end cap as standard for wireway access, or top of housing (W5 option).

ELECTRICAL:

High efficiency LED/Driver combination delivers 160 Lumens/Watt raw array efficacy with 80+ CRI. 4000K color temperature is standard with options for 2700K, 3000K, 3500K, and 5000K. 0-10V dimming comes standard with other control options available. THD <10% @ 120V, <15% @ 277V, PF> 0.95.


MOUNTING:

Designed for HEPA filter grid ceiling; surface, surface in-row, cable, or pendant options available.

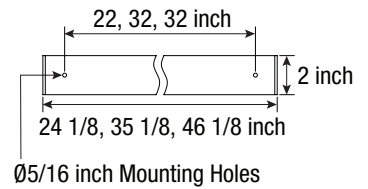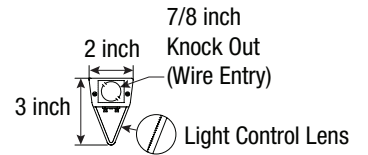

LENGTH (ft)	WEIGHT (lbs)
2	3
3	4
4	5

FEATURES | OPTIONS

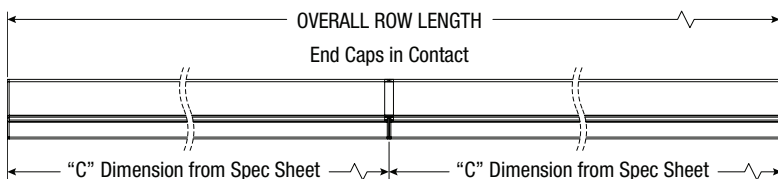

A9 Series – Dry Location

PRODUCT ORDERING CODE

SERIES	LENGTH	MOUNTING	VOLTAGE	CCT	CRI	LUMENS	FINISH	LENS	DIMMING	OPTIONS
PMA9			UNV				AA	LA	LD	
PMA9 Dry Location			UNV 120 - 277 VAC		CRI83 83 CRI CRI90 90 CRI		AA Anodized Aluminum	LA Light Control Acrylic	LD Dimming 0-10V	
	2 2 FT 3 3 FT 4 4 FT	SF Surface Mount CM Cable* Mount PM Pendant** Mount <small>*Requires third-party hardware **Requires third-party mounting stem and hardware</small>		27K 2700K ¹ 3K 3000K 35K 3500K 4K 4000K 5K 5000K		2 FT 17L 1685 lm (10W) 3 FT 25L 2530 lm (18W) 4 FT 34L 3372 lm (24W) <small>Selection must match the selected length</small>				F1 GLR/HLR Fusing (Fast) F2 GMF/HLR Fusing (Slow) M3 In-Row (Surface Mount) ² W5 Rear Wire Entry ³

Footnotes:

¹ Only 90 CRI

² Refer to In-Row Construction drawing (details pg. 1)

³ Consult Factory